



PRESSURE REDUCER MINI SERIES



This article was made in compliance with the quality management requirements of standard ISO 9001:2008. All articles are tested according to the standard EN 12266-1:2003. It can be used in a wide variety of sectors: drinking water distribution networks, heating systems, air conditioning, sanitary systems and generally with any non corrosive liquid.

It is guaranteed for 5 years.


It is made of a brass alloy that complies with standard EN 12165-CW617N-M.

Nominal Pressure: PN 15

Adjustment range: 1 to 4 bar

Operating temperature: 0 to 80°C


FLOW AND PRESSURE DROP

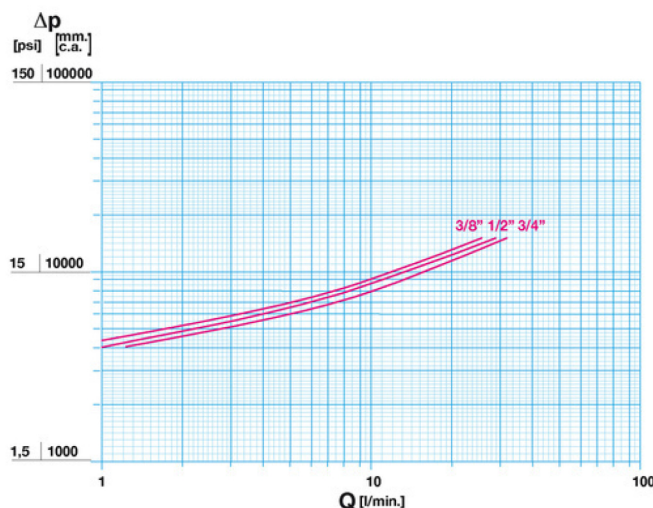

Notes:

- 1 l/min = 0,06 m³/h
- 1 m³/h = 16,67 l/min
- 1 bar = 10.000 mm w.c.
- 1 psi = 690 mm w.c.


PRESSURE TEMPERATURE RATINGS

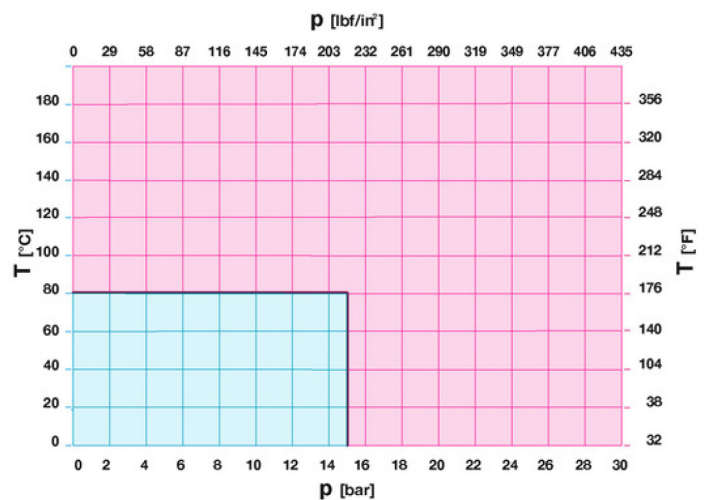

Notes:

- 1 bar = 14,5 psi
- 1 bar = 14,5 lbf/in²
- °C = 5/9 x (°F-32)
- °F = 32 + (9/5 x °C)

TECHNICAL DRAWING

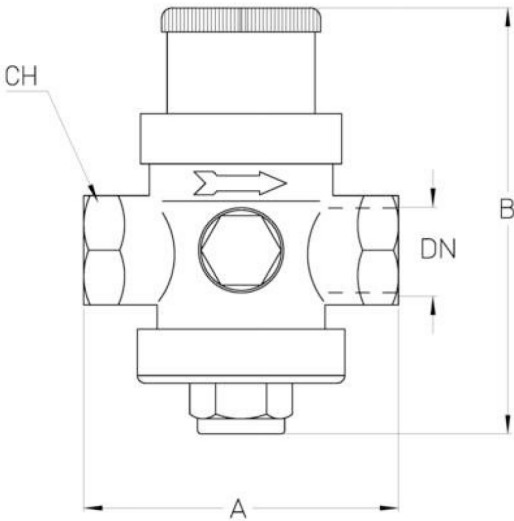

DN	3/8"	1/2"	3/4"
Grms.	440	360	370
A	60	60	60
B	93	93	93
CH	21	21	25

Thread:
ISO 228

TECHNICAL CHARACTERISTICS

Ideal flow rates			
DN	3/8"	1/2"	3/4"
Flow (l/min)	8÷12	10÷14	12÷16
Flow (m3/h)	0,5÷0,7	0,6÷0,8	0,7÷0,8