



Monolink - Terminal Units Connection System



This article was made in compliance with the quality management requirements of standard ISO 9001:2008. All articles are tested according to the standard EN 12266-1:2003. It can be used in a wide variety of sectors: heating, air conditioning, water, sanitary systems and generally with any non corrosive liquid.


It is guaranteed for 5 years.

It is made of a brass alloy that complies with standard EN 12165-CW602N-M.

Nominal Pressure: PN25

Operating temperature: -10 to 120°C

PRESSURE TEMPERATURE RATINGS

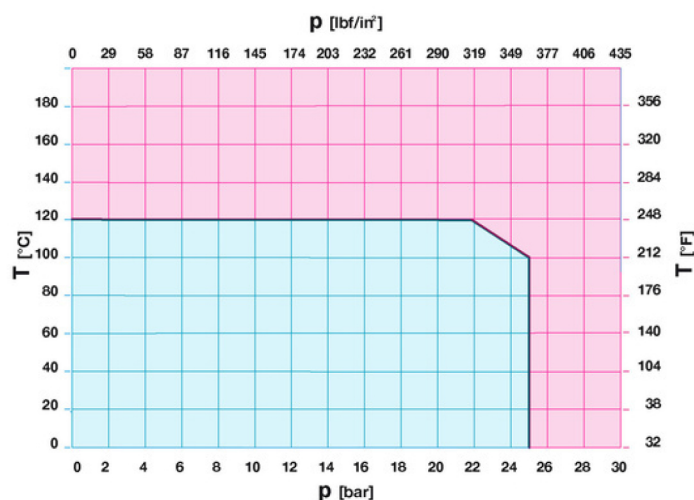

Notes:


1 bar = 14,5 psi

1 bar = 14,5 lbf/in²

°C = 5/9 x (°F-32)

°F = 32 + (9/5 x °C)

TECHNICAL DRAWING

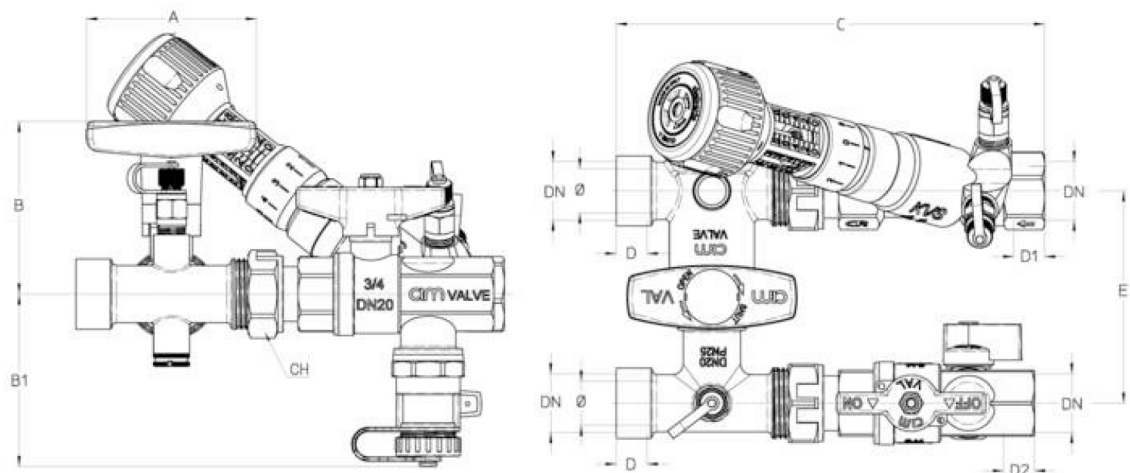

DN	1/2"x1/2"	3/4"x3/4"	1"x1"
Φ mm	15	20	25
Grms.	2060	2820	3670
A	80	80	80
B	77	82	86
B1	88	81	91
C	171	202	243
D	14	15	21
D1	15	16,3	20
D2	16,5	18,5	21
E	100	100	150
CH	31	37	47

Thread:
ISO 7 - Rp, ISO 228